

*Citation for published version:*

Novikova, J, Watts, L & Inamura, T 2015, 'Modeling Human-Robot Collaboration in a Simulated Environment', Paper presented at 10th ACM/IEEE International Conference on Human-Robot Interaction; HRI2015, Portland, USA United States, 2/03/15 - 5/03/15 pp. 181. <https://doi.org/10.1145/2701973.2702035>

*DOI:*

[10.1145/2701973.2702035](https://doi.org/10.1145/2701973.2702035)

*Publication date:*

2015

*Document Version*

Publisher's PDF, also known as Version of record

[Link to publication](#)

© ACM, 2015. This is the author's version of the work. It is posted here by permission of ACM for your personal use. Not for redistribution. The definitive version was published in 10th ACM/IEEE International Conference on Human-Robot Interaction; HRI2015, <http://doi.acm.org/10.1145/2701973.2702035>

## University of Bath

### Alternative formats

If you require this document in an alternative format, please contact:  
[openaccess@bath.ac.uk](mailto:openaccess@bath.ac.uk)

#### General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

#### Take down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

# Modeling Human-Robot Collaboration in a Simulated Environment

Jekaterina Novikova  
University of Bath  
Bath, BA2 7AY  
United Kingdom  
j.novikova@bath.ac.uk

Leon Watts  
University of Bath  
Bath, BA2 7AY  
United Kingdom  
l.watts@bath.ac.uk

Tetsunari Inamura  
National Institute of  
Informatics  
Tokyo, Japan  
inamura@nii.ac.jp

## ABSTRACT

In this paper, we describe a project that explores an open-sourced enhanced robot simulator SIGVerse towards researching a social human-robot interaction. Research on high level social human-robot interaction systems that includes collaboration and emotional intercommunication between people and robots requires a big amount of data based on embodied interaction experiments. However, the cost of developing real robots and performing many experiments can be very high. On another hand, virtual robot simulators are very limited in terms of interaction between simulated robots and real people. Thus we propose using an enhanced human-robot interaction simulator SIGVerse that enables users to join the virtual world occupied by simulated robots through immersive user interface. In this paper, we describe a collaborative human-robot interaction task where a virtual human agent is controlled remotely by human subjects to interact with an automatic virtual robot with implemented artificial emotional reactions. Our project sets the first steps to explore the potential of using an enhanced human-robot interaction simulator to build socially interactive robots that can serve in educational, team building, and collaborative task solving applications.

## Categories and Subject Descriptors

H.5.2 [Information Interfaces and Presentation (e.g., HCI)]: User Interfaces—*Interaction styles*; H.1.2 [Models and Principles]: User/Machine Systems—*Human information processing*

## Keywords

Multimodal interaction; social robotics; robot emotions; human-robot collaboration

## 1. INTRODUCTION

Human-robot teams are becoming commonplace nowadays. However, the idea of a socially interactive robot col-

laborator still poses many challenges from a research perspective and requires a big amount of experimental studies performed with different types of robots in different collaborative scenarios. Typical human-robot interaction (HRI) research is conducted in a laboratory. However, large scale HRI experiments are required to collect big data of social interaction features and models. Such large scale studies usually induce high costs, both financial and time related. In this paper, we propose using an open source enhanced simulator that enables conducting HRI experimental studies with a high number of human subjects from any place in the world. The simulated environment enables researchers to model different HRI tasks and scenarios.

## 2. SYSTEM FRAMEWORK

Our work on a collaborative HRI task was developed based on a simulation platform named SIGVerse [1]. This platform provides a possibility to model the robot agent and the 3D virtual environment for embodied HRI. The entire system framework is presented in Figure 1 and consists of a Server side, Client side and Service Providers. On the Server side, SIGServer is the main part of the simulator that runs core calculations. Agent Controllers are executed on top of SIGServer and simulate agents' intelligence. The agents do not just behave as they were programmed - they can also act on the basis of instructions of various forms given to them by human operators in real time, or on the basis of interaction with their environment. Human users interact with a simulated world and agents via SIGViewer on the Client side. During an HRI simulation, the user is able to control his/her own virtual human avatar through various User Interfaces: GUI, text messages etc. Services Providers offer additional multimodal forms of interaction with a simulated environment, such as sensor processing or image processing.

## 3. EXPERIMENTAL SETUP

In our project, a collaborative table setting task scenario was designed and developed in the simulator. The objective of the task was to pick up the required tableware and dishes from the blue cabinet and set them on the table according to the given table setting. A robot avatar was working in pair with a human agent to simulate the collaborative interaction. In this experiment, the collaborative pairs had to work together to bring eight required tableware and dishes from the blue cabinet, and arrange them in the given table setting order as shown in Figure 2.

The human avatar was controlled by human participants using Kinect and Wii Remote devices, as shown in Fig-

Permission to make digital or hard copies of part or all of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage, and that copies bear this notice and the full citation on the first page. Copyrights for third-party components of this work must be honored. For all other uses, contact the owner/author(s). Copyright is held by the author/owner(s).

HRI'15, March 2–5, 2015, Portland, Oregon, USA.

ACM 978-1-4503-2883-8/15/03.

<http://dx.doi.org/10.1145/2701973.2702035>.

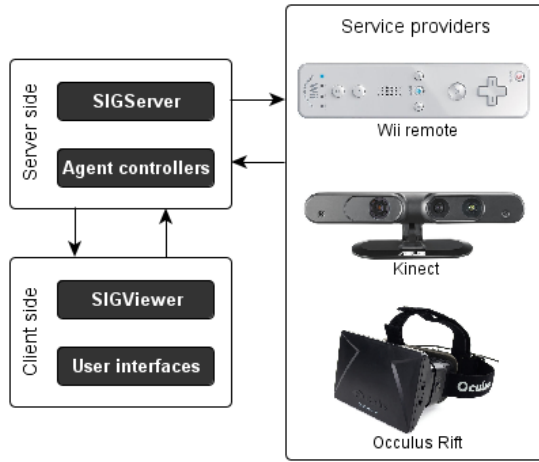


Figure 1: The entire SIGVerse system consists of a Server side, Client side and Service Providers.



Figure 2: A sample table setting order of the experiment.

ure 3. Wii Remote sensor was used to control the walking movements of a human avatar, so that subjects could move around the room. Kinect sensor was used to control the upper body of a human avatar, so that subjects could grasp objects and perform gestures. In addition, human subjects were wearing Oculus Rift head-mounted display in order to both enhance the effect of interaction with a simulated environment and collect the data on subjects' visual attention while performing the task. The robot avatar was programmed to perform the tasks in a pre-scheduled order. We designed two communication styles for the robot avatar in order to investigate abilities of social communication between the robot and the human subjects, motivated by our previous research [4]: (1) robot agent declares its internal state and intentions using text messages (2) robot agent declares its internal state and intentions using both emotional reactions and text messages. Emotional robot reactions were modeled according to the scheme described in [2].

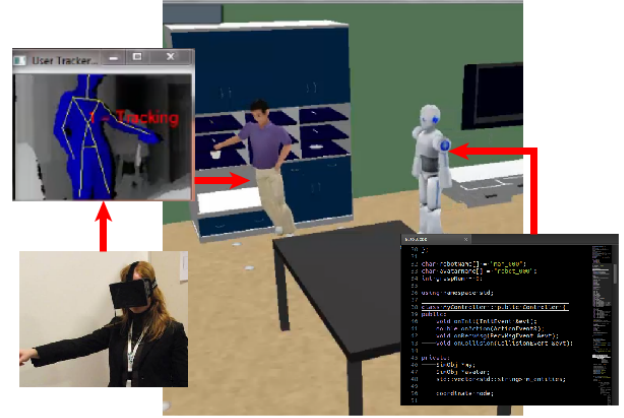


Figure 3: A user is controlling the human avatar through Oculus Rift, Wii Remote and Kinect. The robot avatar is controlled by a pre-programmed controller, executed on a server side of SIGVerse.

In our experimental study, we used two emotional reactions - surprise and happiness - to enrich a social communication between the robot and human subjects. The reactions consisted of emotional body expressions, designed according to the scheme discussed in [3].

## 4. CONCLUSIONS

In the described experimental study, we focused our effort on exploring and investigating the potential of using an enhanced HRI simulator to model collaborative interaction with socially intelligent robots. A system framework was proposed to integrate the HRI into a 3D simulation platform SIGVerse to achieve multimodal social interaction between people and robots. The paper on site will further describe data analysis results and experimental investigations on the behavior of the subjects during a collaborative task and the performance of the socially interactive system.

## 5. REFERENCES

- [1] T. Inamura, T. Shibata, H. Sena, T. Hashimoto, N. Kawai, T. Miyashita, Y. Sakurai, M. Shimizu, M. Otake, K. Hosoda, et al. Simulator platform that enables social interaction simulation - sigverse: Sociointelligence simulator. In *System Integration (SII), 2010 IEEE/SICE International Symposium on*, pages 212–217. IEEE, 2010.
- [2] J. Novikova, S. Gaudl, and J. Bryson. Emotionally driven robot control architecture for human-robot interaction. In *Towards Autonomous Robotic Systems*, Lecture Notes in Computer Science, pages 261–263. Springer Berlin Heidelberg, 2014.
- [3] J. Novikova and L. Watts. A design model of emotional body expressions in non-humanoid robots. In *Proceedings of the Second International Conference on Human-agent Interaction, HAI '14*, pages 353–360. ACM, 2014.
- [4] J. Novikova and L. Watts. Towards artificial emotions to assist social coordination in hri. *International Journal of Social Robotics*, pages 1–12, 2014.